


Outdoor VR Dome Camera



The vandal-resistant housing offers better protection to the camera, while its elegant dome design makes it ideal for a less intrusive presentation, especially for listed buildings.

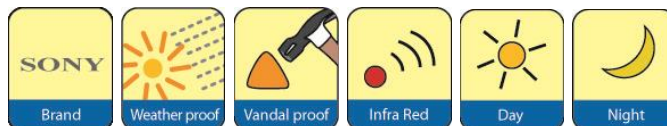

Key Features:

- 1/3" Sony® Super HAD CCD II
- 600 TV Lines High Resolution
- Smart IR function – Auto IR intensity adjustment of objects at short distances
- Digital Noise Reduction (2D DNR)
- 24 IR LED for Low light Environment

Specifications:

Image Sensor	1/3" Sony® Super HAD CCD II
Horizontal Resolution	More than 600 TV Lines
Lens	3.6mm (Optional 2.9mm / 6.0mm)
Min Illumination	0.01 ux@ F1.2 (Normal High Mode, 50 IRE0 0.000 Lux (CDS On)
Effective Pixels	768(H) x 494(V) – NTSC; 752(H) x 582(V) – PAL
Video Output	CVBS : 1.0Vp-p / 75 Ohm
Scanning System	2:1 Interlace
Sync. System	Internal
Electronic Shutter Speed	1/60~1/100,000 Sec – NTSC; 1/50~1/100,000 Sec – PAL Auto / Manual / Flickerless
S/N Ratio	52dB (AGC Off, Weight On)
Operating Temp.	14°F~122°F / -10~+50°C
Operating Humidity	30% ~ 85% RH
Power Supply	DC 12V / 300mA
Dimension (Φ x H)	97mm x 80mm

* Specifications are subject to change without notice

NurseryCam 